

# TDA2E SoC Processor for Advanced Driver Assist Systems (ADAS) Technical Brief

## 1 Device Overview

### 1.1 Features

- Architecture Designed for ADAS Applications
- Video, Image, and Graphics Processing Support
  - Full-HD Video (1920 x 1080p, 60 fps)
  - Multiple Video Input and Video Output
- ARM® Cortex®-A15 Microprocessor Subsystem
- C66x Floating-Point VLIW DSP
  - Fully Object-Code Compatible With C67x and C64x+
  - Up to Thirty-two 16 x 16-Bit Fixed-Point Multiplies per Cycle
- Up to 512KB of On-Chip L3 RAM
- Level 3 (L3) and Level 4 (L4) Interconnects
- DDR3/DDR3L Memory Interface (EMIF) Module
  - Supports up to DDR3-1333 (667MHz)
  - Up to 4GB Across Two Chip Selects
- Two ARM Dual Cortex-M4 Image Processing Units (IPUs)
- IVA-HD Subsystem
- Display Subsystem
  - Display Controller With DMA Engine and up to Three Pipelines
  - HDMI Encoder: HDMI 1.4a and DVI 1.0 Compliant
- Single-Core PowerVR™ SGX544 3D GPU
- 2D-Graphics Accelerator (BB2D) Subsystem
  - Vivante® GC320 Core
- Video Processing Engine (VPE)
- One Video Input Port (VIP) Module
  - Support for up to 4 Multiplexed Input Ports
- General-Purpose Memory Controller (GPMC)
- Enhanced Direct Memory Access (EDMA) Controller
- 2-Port Gigabit Ethernet (GMAC)
  - Up to Two External Ports, One Internal
- Sixteen 32-Bit General-Purpose Timers
- 32-Bit MPU Watchdog Timer
- Six High-Speed Inter-Integrated Circuit (I<sup>2</sup>C) Ports
- Ten Configurable UART/IrDA/CIR Modules
- Four Multichannel Serial Peripheral Interfaces (MCSPIs)
- Quad SPI Interface (QSPI)
- SATA Interface
- Multichannel Audio Serial Port (MCASP)
- SuperSpeed USB 3.0 Dual-Role Device
- High Speed USB 2.0 Dual-Role Device
- High Speed USB 2.0 On-The-Go
- PCI Express® 2.0 Port With Integrated PHY
  - One 2-lane Gen2-Compliant Port
  - or Two 1-lane Gen2-Compliant Ports
- Dual Controller Area Network (DCAN) Modules
  - CAN 2.0B Protocol
- Up to 215 General-Purpose I/O (GPIO) Pins
- Real-Time Clock Subsystem (RTCSS)
- Power, Reset, and Clock Management
- On-Chip Debug With CTools Technology
- 28-nm CMOS Technology
- 23 mm x 23 mm, 0.8-mm Pitch, 760-Pin BGA (ABC)



## 1.2 Applications

- LVDS or Ethernet Surround View
  - 3D surround view
  - Rear object detection
  - Parking assist
  - Pedestrian Detection
  - Lane tracking
  - Drive Recording
- Sensor Fusion – Vision, Radar, Ultrasonic, Lidar sensors
  - Object data fusion
  - Raw data fusion

## 1.3 Description

TI's new TDA2Ex (TDA2Eco) system-on-chips (SoCs) are a highly optimized and scalable family of automotive processors designed to meet the requirements of leading Advanced Driver Assistance Systems (ADAS). The TDA2Eco family targets today's entry-to-mid-range automobiles by integrating an optimal mix of performance, low power and ADAS vision analytics processing that aims to facilitate a more autonomous and collision-free driving experience.

The TDA2Ex SoC enables sophisticated embedded vision technology in today's automobile by enabling a broad range of ADAS applications including park assist, surround view and sensor fusion on a single architecture.

The TDA2Ex SoC incorporates a heterogeneous, scalable architecture that includes a mix of TI's fixed and floating-point TMS320C66x digital signal processor (DSP) generation core, ARM Cortex-A15 MPCore™ and dual-Cortex-M4 processors. The integration of a video accelerator for decoding multiple video streams over an Ethernet AVB network, along with graphics accelerator for rendering virtual views, enable a 3D viewing experience. And the TDA2Ex SoC also integrates a host of peripherals including multi-camera interfaces (both parallel and serial including CSI-2) to enable Ethernet or LVDS-based surround view systems, displays and GigB Ethernet AVB.

Additionally, TI provides a complete set of development tools for the ARM and DSP, including C compilers, a DSP assembly optimizer to simplify programming and scheduling, and a debugging interface for visibility into source code execution.

The TDA2Ex ADAS processor is qualified according to the AEC-Q100 standard.

### Device Information

PART NUMBER	PACKAGE	BODY SIZE
TDA2Ex	FCBGA (760)	23.0 mm x 23.0 mm

### 1.4 Functional Block Diagram

Figure 1-1 is functional block diagram for the device.

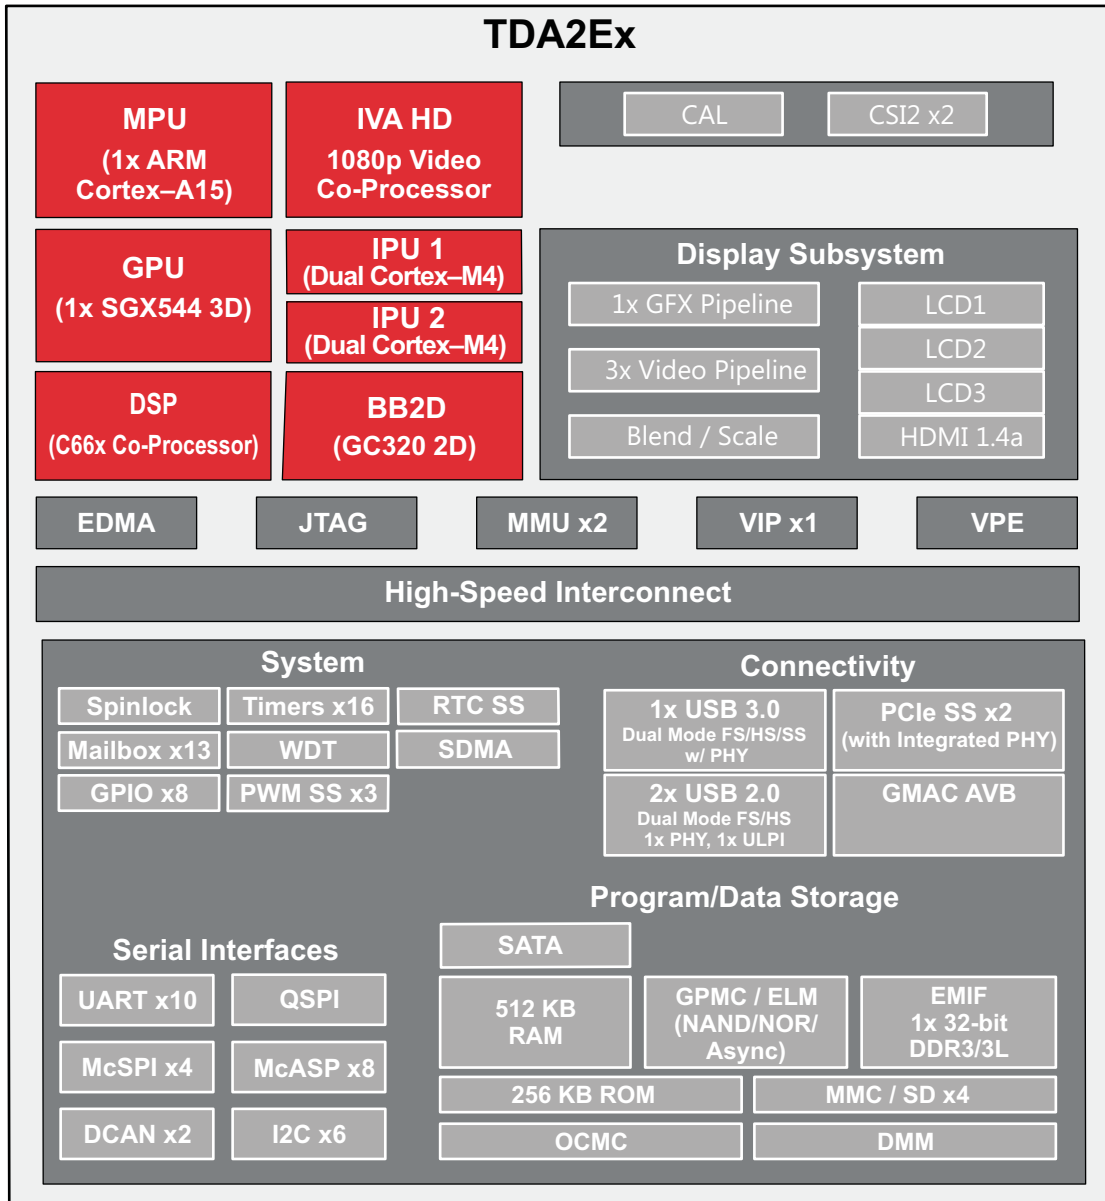


Figure 1-1. TDA2Ex Block Diagram

### 1.5 Trademarks

ARM, Cortex are registered trademarks of ARM Limited.  
 PowerVR is a trademark of Imagination Technologies Limited.  
 PCI Express is a registered trademark of PCI-SIG.  
 Vivante is a registered trademark of Vivante Corporation.  
 All other trademarks are the property of their respective owners.

PRODUCT PREVIEW

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)